


Vacuum Pump

Model VPO660



Airflow & Power Consumption

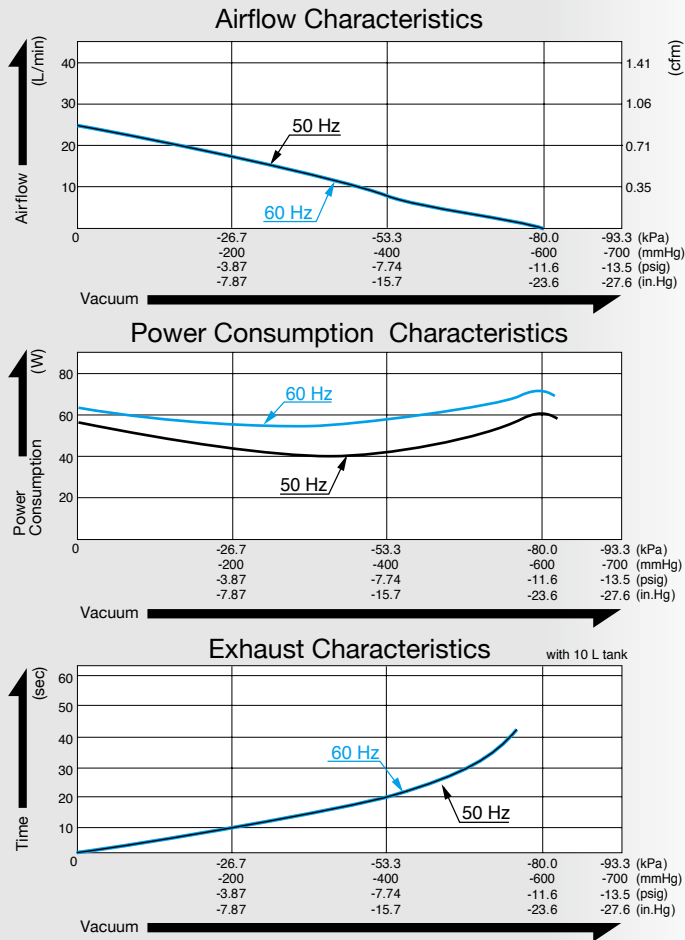


Specifications

| | | |
|-----------------------|--|---------------------|
| Attainable Vacuum *1 | -80 kPa (-600 mmHg) -800 mbar -23.6 in. Hg | |
| Free Air Displacement | 25 L/min 0.88 cfm | |
| Rated Voltage | 115 V AC | 230 V AC |
| Power Consumption | 70 W | 60 W |
| Rated Frequency | 60 Hz | 50 Hz |
| Rated Performance | 6,000 hours | |
| Inlet | ISO Rc 1/4 | |
| Outlet | ISO Rc 1/4 | |
| Duty Cycle | Continuous | |
| Coil Insulation Class | E or its equivalent and B for UL | |
| Mounting Dimensions | 102 (L) x 130 (W) mm 4 - 1/64" (L) x 5 - 1/8" (W) | |
| Weight | 5 kg 11 Lbs | |
| Leadwire Length | 300 mm 11 - 13/16" | 600 mm 23 - 5/8" |


*1: Operations at higher than -80 kPa need an additional leak valve or relief valve on the inlet piping.

Application Examples

Vacuum Material Handling Equipment



Vacuum Chucking



External Dimensions (Unit: mm)

